


Type \_\_\_\_\_  
 -30  
 P8069

Catalog No.	Finish White	Dimensions (Inches)	
		A	B
P8069	-30	7-3/4	3

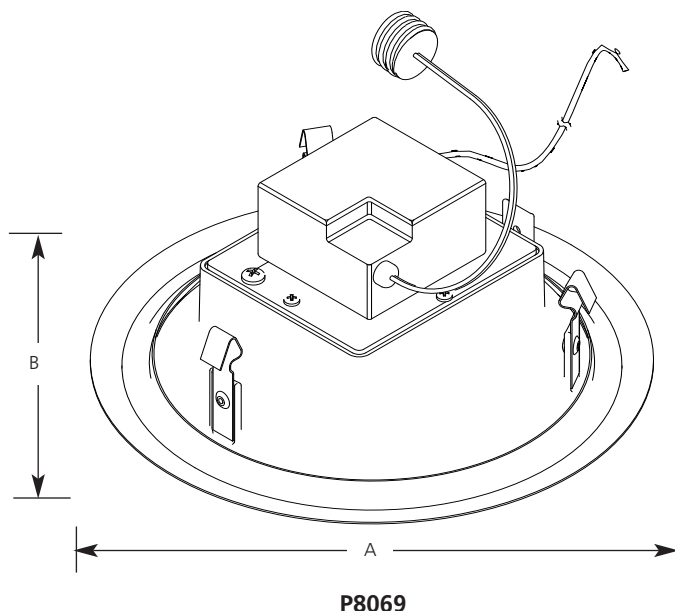

**UL Classified for Use Only With the Following Recessed Luminaires (UL File E257838)**

Manufacturer	Size	Model #
Emerald®	6"	P1-ICTn
Luminaire®	6"	LUICT-00
Juno®	6"	IC22
Commercial Electric®	6"	C7ICA(H3)
Lithonia®	6"	L7X
Intense®	6"	I6AIC

(Consult factory for other competitive housing compatibility)

**Specifications:**

Trim Assembly

- White powder coat painted finish
- Removable trim ring can be painted to match ceiling
- Frosted acrylic lens provides a 120 degree beam spread
- Installation with three spring clips
- No light leaks around trim flange
- Die cast construction

Lamping

- LED (Light Emitting Diode) Lamp included
- LED module is held in place with two screws and is replaceable
- Consumes 15 watts
- 2750K color temperature
- +40 LPW LED sources produce a total of over 675 Lumens

- 30,000+ hrs life
- Lamp contains no mercury, meets Calif. Title 22
- Meets California Title 24 high-efficacy requirements

Electrical

- Integral transformer
- Medium base on trim attaches to housing socket
- Dimmable using standard incandescent dimmers
- 120v input

Labeling

- UL-CUL listed

Progress Lighting  
 Post Office Box 5704  
 Spartanburg, South Carolina  
 29304-5704