

# WATER CONSERVATION PRODUCTS



## MASSAGING ADJUSTABLE SHOWERHEADS

- 2.0 gpm or less at 80 psi
- High-impact plastic body; white or chrome finish
- Adjustable non-aerating spray and pulsating spray



- 3000.20** 2.0 gpm Showerhead White  
**3000.161** 1.75 gpm Showerhead Chrome

## HAND-HELD SHOWERHEADS

- 2.0 gpm at 80 psi
- High-impact plastic body
- Adjustable non-aerating spray and pulsating spray
- Chrome or white finish
- 6' flexible hose



- 3000.204** Hand-Held Showerhead White  
**3000.205** Hand-Held Showerhead Chrome

## PIPE INSULATION




- Flexible elastomeric foam pre-slit for easy installation
- Suitable for use on domestic hot water pipes only
- Tolerates temperatures from 90°F to 180°F

- 4000.03** 5/8" x 3' Pipe Insulation (4-Pack = 12')  
 1/2" ID x 3/8" wall x 3' length; R-Value = 2.2  
**4000.031** 7/8" x 3' Pipe Insulation (4-Pack = 12')  
 3/4" ID x 3/8" wall x 3' length; R-Value = 2.2

## EVOLVE™ SHOWERSTART™ SHOWERHEAD

When the shower is initially turned on the ShowerStart™ device monitors the water temperature. When the water temperature reaches bathing temperature, (95°F / 35°C), the conservation mode is activated and the device "triggers a trickle". This prevents your hot water from running down the drain before you're ready to get in the shower. The water for your shower is now warm and waiting instead of warm and wasted. Turn the valve on the showerhead, the water flow will resume.

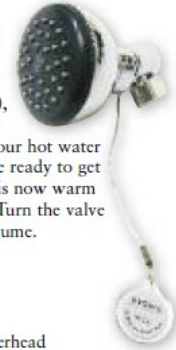

- 1.59 gpm max @ 80 psi
- Pressure compensating flow regulator
- Non-aerating spray

- 3000.53** Evolve™ ShowerStart™ Showerhead

## FAUCET AERATORS

- Chrome-plated solid brass body

- 3010.02** Standard Aerator  
 1.5 gpm at 80 psi

- 3010.04** Standard Aerator,  
 2.2 gpm at 80 psi

- 3010.1** Kitchen Aerator with Flip,  
 2.2 gpm at 80 psi

- 3010.41** Aerator with Flow-Control Button,  
 1.5 gpm at 80 psi



## Swivel Aerator

- Chrome-plated plastic body
- Swivel control to direct flow all around the sink in a solid stream or a wide spray
- Features flow-control lever for temporary water interruption

- 3010.45** Swivel Aerator with Lever  
 2.5 gpm at 80 psi



## TOILET TANK BANK

- Maintenance-free toilet displacement bag saves up to 0.8 gallons with every flush

- 3020.10** Toilet Tank Bank

