

# TIMERS AND CONTROLS



## AIRETRAK ADVANTAGE™



- 4 wires plus ground
- Fits in a single gang box, can be installed in 2 or 3 gang boxes
- Decora style plate
- Independent fan and light controls
- 24 hour clock display
- 120 vac, 2.5 amps, 300w max output

The Airetrak Advantage™ allows the installer to set up a pattern of low speed operation for the fan, giving the occupant the ability to boost the fan to full speed when needed.

The low speed pattern is set in 5 minutes segments over either 12 or 24 hours. Choose the low speed, choose how many minutes per hour, (5, 10, 20 etc), then choose to repeat this pattern for either 12 hours or 24 hours. At the top of each hour the fan will come on for the set time at the set speed.

The full speed boost function can be set for 20 minutes, 40 minutes or continuous. Use the "Fan Only" button to boost the fan without turning on the light, use the "Fan & Light" button to turn on both. Push the button again to stop the override and return to the low speed operation.

**5010.431** Airetrak Advantage Timer — White

## REVERSE THERMOSTAT



- 2 wires
- Surface Mounted Control, requires its own box

Available in beige only. Often used with whole house cooling fans and for recirculating heat from wood stoves. With a range of 80°F to 130°F, this control will turn a fan on when the temperature rises and turn it off when the temperature falls.

**5010.62** Reverse Thermostat — Beige

## AIRCYCLER FR AIRCYCLER FR-V



The AirCycler FR is a timing device that can be used to circulate fresh air throughout the home. It can be used in homes that have a ducted heating or air conditioning system.

The AirCycler FR will periodically run the furnace blower motor if the thermostat has not called for heat or air conditioning for a set period of time. With an exhaust fan running in the home, this action will serve to distribute incoming fresh air throughout the home by mixing the indoor air.

The FR-V model contains an extra relay that is wired to a motorized damper installed in an intake duct for the purpose of bringing fresh air directly in to the duct system when the furnace blower motor is turned on by the AirCycler.

**5010.75** AirCycler Timer Model FR

**5010.751** AirCycler Timer Model FR-V

Parts used with the FR-V model to bring in fresh air:

**5540.3** 6" Air Control Damper NC  
Low voltage (normally closed)




**5540.32** 6" Intake Grille — White

**5540.321** 6" Intake Grille — Brown



## INSTALLATION EXAMPLE

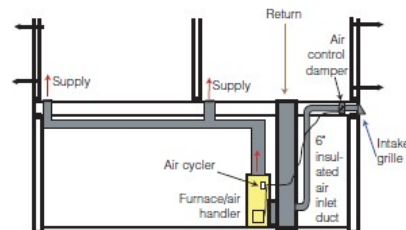

23

National distributor shipping direct throughout the United States  
**TO PLACE ORDERS OR FOR MORE INFORMATION:**  
**800/876/0660** ✎ **FAX 888/440/4219**  
**WISCONSIN 800/962/7015** ✎ **WISCONSIN FAX 920/757/6452**  
 HEADQUARTERS 40 Washington Street, Westborough, Massachusetts 01581 • [www.efi.org/wholesale](http://www.efi.org/wholesale)